


Customer Details
Example Customer

Tel: , Fax:

Quote No: Q004827
Ref: Eample Lean-To

Roof Manufacturing Details

Roof Materials Details
Ref: CeluPlast Roof System Apr14 (Structural)
Groups: >a0yMC = Default
Loading: 60.0+30.0+self-weight kg
Colours: N/A,N/A
Shingle:
Shingle Colour : Titanium (Grey)
Conservatory Details
Size: 3500mm width, 2500mm depth
Height: 2100mm windows + 1016mm roof
Total: 3116mm
Weight: 732.540 kg
Section Depth: 70mm
Manu. Type:

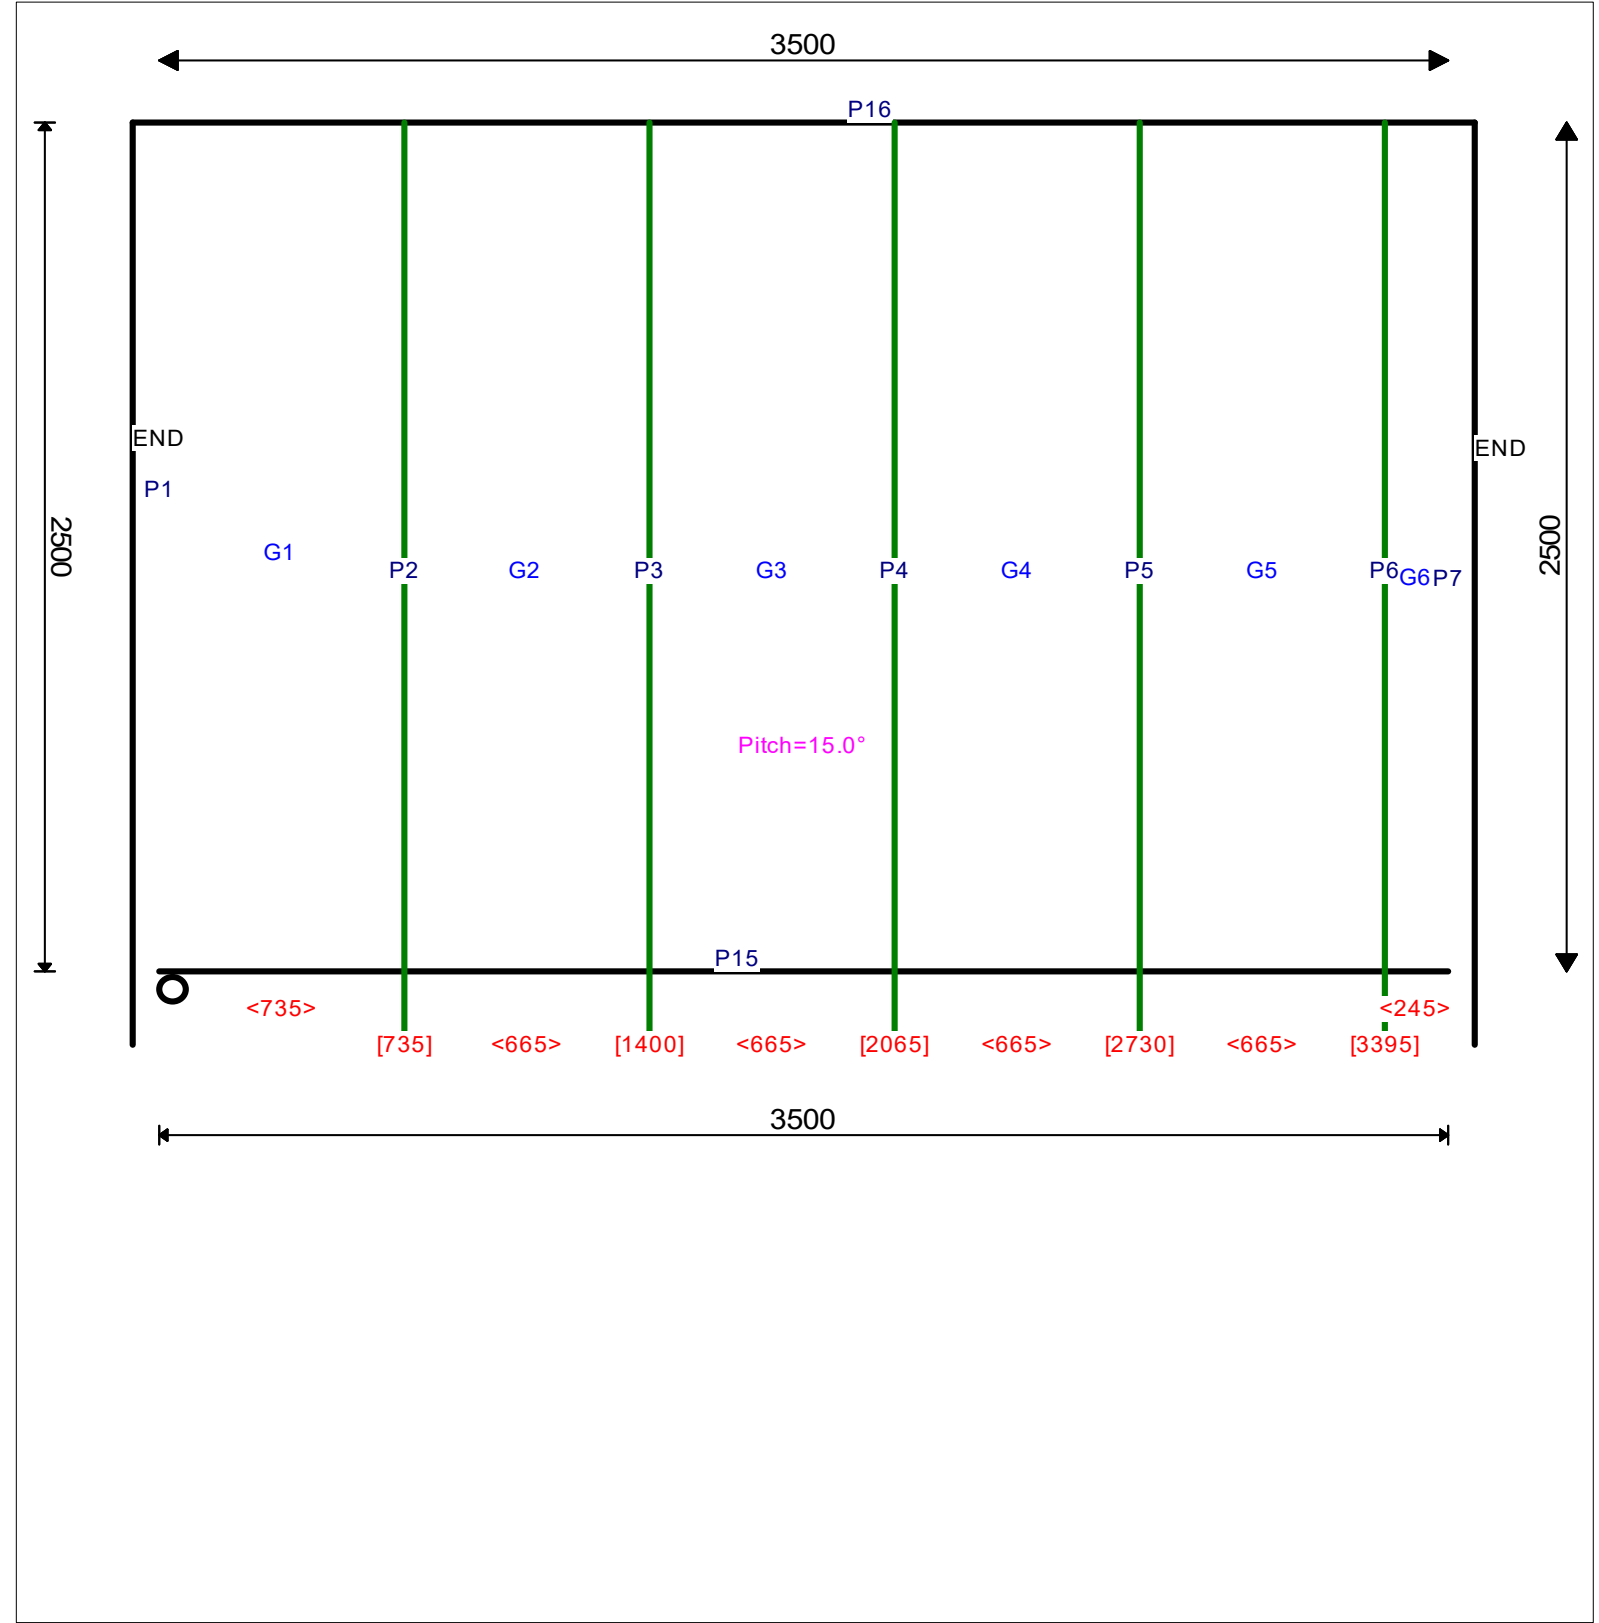

Roof Manufacturing Details

Lbl	Description	Qty	Length	Len. 2
Hips/Valleys/End Bars				
P1	End Rafter	1	[-62] 2754	2715
P1	Two Piece Barge Cover Ebony 1.25	1	[-62] 2754	
P7	End Rafter	1	[-62] 2754	2715
P7	Two Piece Barge Cover Ebony 1.25	1	[-62] 2754	
Rafters/Tie Bars				
P2	Rafter (Lean)	1	[-62] 2754	2715
P2	leanto barge board	1	[-62] 2754	2715
P2	wall end sofit	1	[-62] 2754	2715
P2	Sofit starter J Section	1	[-62] 2754	2715
P3	Rafter (Lean)	1	[-62] 2754	2715
P3	leanto barge board	1	[-62] 2754	2715
P3	wall end sofit	1	[-62] 2754	2715
P3	Sofit starter J Section	1	[-62] 2754	2715
P4	Rafter (Lean)	1	[-62] 2754	2715
P4	leanto barge board	1	[-62] 2754	2715
P4	wall end sofit	1	[-62] 2754	2715
P4	Sofit starter J Section	1	[-62] 2754	2715
P5	Rafter (Lean)	1	[-62] 2754	2715
P5	leanto barge board	1	[-62] 2754	2715
P5	wall end sofit	1	[-62] 2754	2715
P5	Sofit starter J Section	1	[-62] 2754	2715
P6	Rafter (Lean)	1	[-62] 2754	2715
P6	leanto barge board	1	[-62] 2754	2715
P6	wall end sofit	1	[-62] 2754	2715
P6	Sofit starter J Section	1	[-62] 2754	2715
Ring Beams				
P15	Ring Beam 20-25 Degrees White	1	3500	
P15	Vented Fascia Board	1	3500	
P15	Ring beam sofit	1	3500	
P15	Sofit Starter J Section	1	3500	
Gutters				
P15	Downpipe 2.5m	1	2100	
P15	Gutter	1	[+480] 3980	
Miscellaneous Items				
	Expanding Tape (Seal Strip)	2	5508	
	Downpipe Shoe	1	off	
	Offset Bends	2	off	
	Downpipe Clips	3	off	
	Multi Positional Outlet	1	off	
	Overslung Gutter Brackets	6	<750>	
	Gutter Stop End L/H	1	off	
	Gutter Stop End R/H	1	off	
	Breather Roll	1	off	
	Touch Up Kit Ebony	1	off	
	Installation Guide	1	off	
	EXPANDING FOAM	2	off	
	Glue	1	off	
	Ridge Cap Charge	1	off	
	Shingle Ebony	36	off	
	Tile Fixings	145	off	
Screws & Fixings				
	Guardian Single Bolt	84	off	
	M6 x 20mm Hex Setscrew	88	off	
	M6 Hex Flange Nut	172	off	